




# FA 60 003 20, FA 60 003 30



A	15,5 cm
B	17 cm
C	16 cm
X	13,5 cm
Y	28 cm

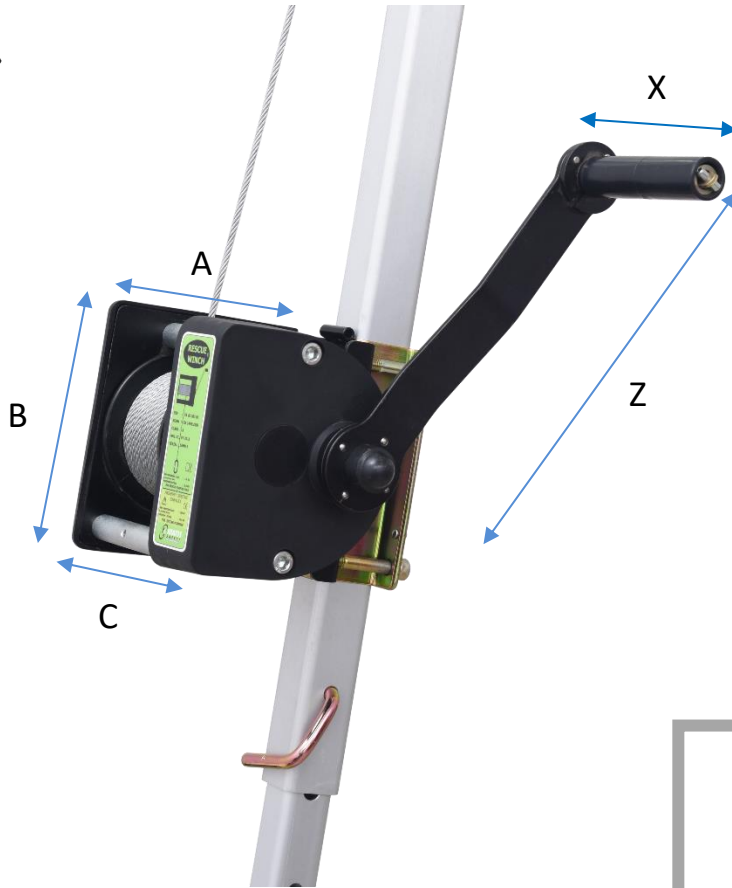






**FA 60 003 20**



**FA 60 003 30**



<b>HS CODE</b>
84251900
<b>CARTON SIZE / PCS.</b>
40 x 30 x 20 cm / 1
<b>Certificate of Test</b> n°SPC0256516/1716 Issue 2 Ext. 1
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom

REF.	FA 60 003 20	FA 60 003 30
LG.	20 m	30 m
CE	EN 1496:2017 Class A	
	x1	
	135 KG	
MAT. 		
R (kN) / MBS (kN)	---	---
+	(1) EN 13157 (1) Machinery Directive: 250 KG (1) ATEX Directive:  II2 G Exh IIC T6 Gb  (2) Compatible FA 60 101 00, FA 60 102 00, in combination with FA 60 101 01 (2) Compatible FA 60 022 00, in combination with FA 60 022 06	
	7.95 KG	9.65 KG



**Nombre d'utilisateurs**  
Number of users  
**Cantidad de usuarios**  
Quantità di utilizzatori  
**Anzahl der Benutzer**



**Charge maxi admissible**  
Max. allowed load  
**Carga máxima admisible**  
Carico massimale ammissibile  
**Zulässige Höchstlast**



**Matière câble**  
Material wire rope  
**Material cable**  
Material dei cavo  
**Material Seil**

+

R (kN) / MBS

(1)  
**Point fort**  
Key feature  
**Ventaja principal**  
Punti forti  
**Produktvorteil**

(2)  
**À utiliser avec**  
To be used with  
**Para usar con**  
Ad essere utilizzato con  
**Verwendet werden soll mit**

**Résistance statique (en kN) / Résistance à la rupture (en kN)**  
Static strength (kN) / Minimum Breaking Strength (kN)  
**Resistencia estática (en kN) / Resistencia a la ruptura (kN)**  
Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**