


Adjustable extra large jaw opening for stacks, packages and thick single plate lifting

Application:

- For horizontal lifting, handling and transporting of banded/secured stacks, packages and or single thick steel plates
- Terrier THSK lifting clamps must always be used in pairs (or multiple pairs)
- Adjustable jaw offers wide variety of openings available from 3 to 420 mm
- Working load limit (WLL) 1500 - 9000 kg per pair

Features and Benefits:

- Easy adjustable jaw opening
- Quick and easy placing and removing of the clamp
- Lightweight design for easy handling
- Tough quality heavy duty welded body

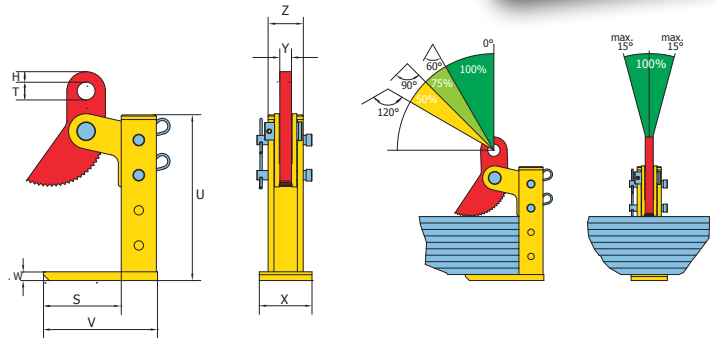

Article Nr.	Type	Capacity (kg/pair)	Jaw opening (R) (mm)	Dimensions in mm									Weight (kg/pc)
				V	S	W	T	H	U	X	Z	Y	
815180	1.5 THSK/180	1500	3 - 180	201	135	15	30,5	18	289	90	60	20	9,5
815300	1.5 THSK/300	1500	3 - 300	201	135	15	30,5	18	409	90	60	20	11
830180	3 THSK/180	3000	3 - 180	241	165	20	30,5	18	296	105	69	20	13
830300	3 THSK/300	3000	3 - 300	241	165	20	30,5	18	416	105	69	20	15
845180	4.5 THSK/180	4500	3 - 180	241	165	20	30,5	18	296	105	69	20	13
845420	4.5 THSK/420	4500	3 - 420	241	165	20	30,5	18	536	105	69	20	17
860180	6 THSK/180	6000	3 - 180	256	160	25	30,5	18	304	120	75	20	18
860420	6 THSK/420	6000	3 - 420	256	160	25	30,5	18	544	120	75	20	24
890180	9 THSK/180	9000	3 - 180	256	160	25	30,5	18	304	120	75	20	18
890420	9 THSK/420	9000	3 - 420	256	160	25	30,5	18	544	120	75	20	24

FHX-V


User-friendly horizontal clamp where the torsion spring ensures that the clamp stays in position after it has been set in place

Application:

- For horizontal lifting and transporting of steel plates and other non-deflecting materials
- Terrier FHX-V lifting clamps must always be used in pairs (or multiple pairs)
- Jaw openings available from: 0 to 60 mm
- Working load limit (WLL) 1000 - 6000 kg

Features and Benefits:

- Pre-tensioned spring cam feature for easy single operator usage
- Clamp can be closed and fixed on any desired spot
- Compact and lightweight design for easy handling
- Tough quality heavy duty welded body

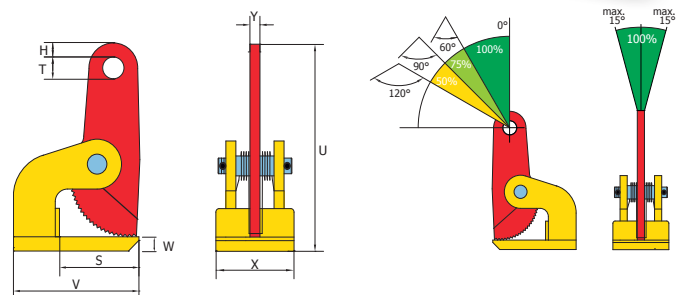

Article Nr.	Type	Capacity (kg/pair)	Jaw opening (R) (mm)	Dimensions in mm								Weight (kg/pc)
				V	S	W	T	H	U	X	Y	
953101	1 FHX-V	1000	0 - 35	140	99	10	26,5	12	188	85	15	3
953201	2 FHX-V	2000	0 - 60	180	114	15	30,5	19	286	125	16	8
953301	3 FHX-V	3000	0 - 60	200	125	20	30,5	19	302	140	20	12,2
953401	4 FHX-V	4000	0 - 60	220	139	30	30,5	19	316	165	20	17
953601	6 FHX-V	6000	0 - 60	220	139	30	30,5	19	316	165	20	17